

VDS[®] by FORSTER[®] 90

Fire-Rated Framing System

CLASSIFICATION




PRODUCT DESCRIPTION

90 minute fire rated wall assembly with narrow profiles providing open vision areas allowing natural daylight without compromising life safety and design flexibility. This fully-insulated system can be complemented with 90 minute rated doors where requested.

TECHNICAL SPECIFICATIONS

US Testing/Compliant	ASTM E 119, UL 101, UL 263, NFPA 80, NFPA 252, NFPA 257
CAN Testing/Compliant	CAN/ULC-S101
Finish Options	Powder Coat/Enamel
Custom Colors ¹	Yes
Fabrication	Welded/Clipped
Certification	Underwriters Laboratories
Fabricated in the US	Yes
Glazing Options	CONTRAFLAM 90
Single/Double Doors	Yes (see VDS Doors)
Weight (lbs/lin. ft.)	5 (does not include glass)

DETAILS

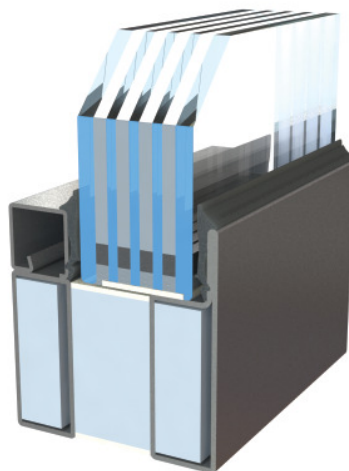

¹Surcharge may apply

Rev. 1.18.17 The information published in this document is correct at the time of going to press. Such information may be subject to change and products may be modified.